

Kawasaki

Assembly Instructions

Part Number	Description	Model	Approx. Assembly Time
K57003-118	Tank Bag	Versys-2015	20 Minutes

Before you begin installation, read through the installation instructions and check to be sure all parts are present.

If you are in doubt as to any part of the installation, please ask your authorized Kawasaki dealer to complete the installation. Please note that Kawasaki cannot assume any responsibility for damage resulting from incorrect installation.

Parts List:

Ref. #	Description	Qty
A01	Tank Bag	1
A02	Rear Strap	1
A03	Clear Self Adhesive Tape	1

WARNING

- Do not load bag with more than 2 kg (5 lbs).
- Do not exceed the maximum vehicle load. Review your vehicle owner's manual for information regarding proper loading.
- Before riding, make sure the bag is securely attached and the lid is zipped closed.


NOTICE

Do not store temperature or moisture sensitive devices in the tank bag or lid tray.
Tank bag is only water-resistant; take care to protect cargo in rainy weather.
Carefully clean the fuel tank mounting surfaces and the underside of the tank bag before each ride.
Kawasaki cannot be responsible for any damage to the fuel tank finish or devices stored in the tank bag
Do not store magnetic data devices in bottom of tank bag or allow such devices to come in contact with magnets.

Installation Instructions:


1. Park the vehicle on level ground, set the parking brake, turn off the ignition switch.
2. Refer to the vehicle Owner's Manual to remove the seat.

3. Position the rear strap (A02) on the fuel tank bracket by looping the left and right tabs rearward under each side so that the loop patch aligns with the hook patch and align magnet end as shown.

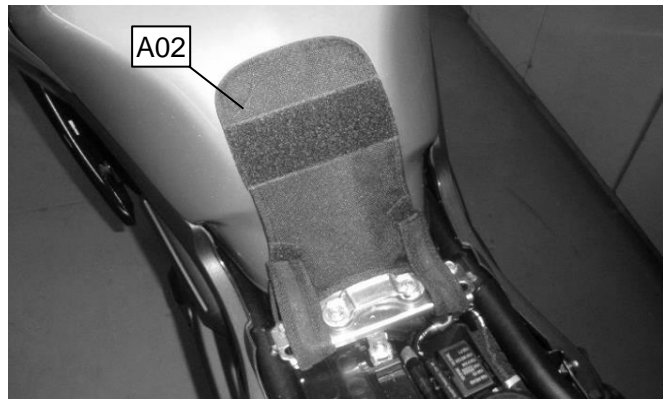


4. Clear Self Adhesive tape (A03) has been supplied to protect painted surfaces, apply the tape to the painted surfaces as needed.

5. Replace seat and check rear strap position as shown.

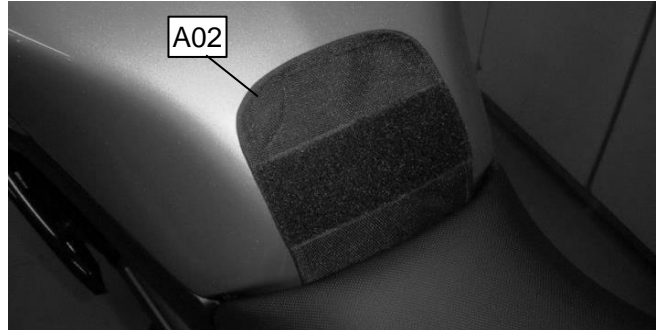


6. Align front strap clip onto fuel tank seam as shown.

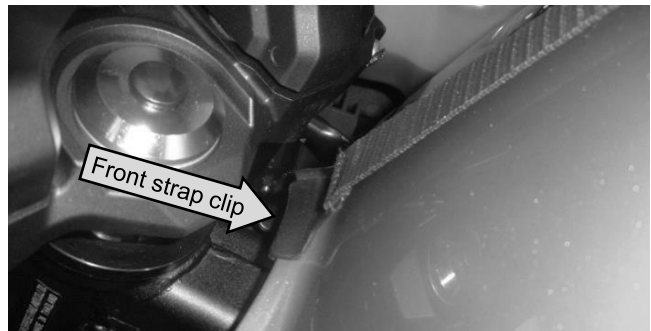

7. Pull tank bag back until front strap is snug and spread sides to engage magnet base onto fuel tank.

8. Press rear of tank bag firmly onto rear strap Hook and Loop.

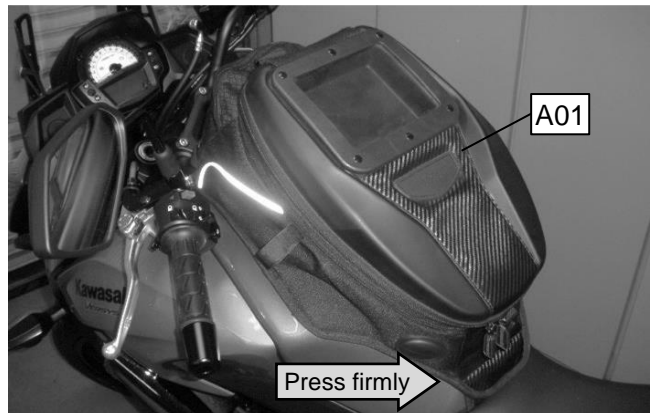

Care and Cleaning:

Clean the tank bag with mild soap and warm water. Do not use harsh abrasive cleaners. Cover the clear tray window when parked to minimize UV damage.